

NO CONSTRUCTION SHALL START PRIOR TO ACQUIRING YOUR PERMITS!!

In order to speed up the approval process, please ensure you have done the following:

- 1. Meet the Zoning Requirements of the Municipality
 - Determine the zoning in the area that you intend to build. A building permit will not be issued unless a Development Permit has been issued by the municipality.
 - Ensure you comply with the zoning requirements, including setback requirements.
 - Complete the Application for Development Permit and submit to the RM of Big River No. 555 along with the Development Permit Fee (Permitted Use \$50.00, Discretionary Use\$200.00).
- 2. Complete and Submit the Application for Building Permit
 - Complete the Application for Building Permit.
 - Submit the completed application form along with 1 complete set of plans to the RM office.
 - The application will be forwarded to BuildTECH Consulting & Inspections Inc., the municipality's building inspector, for approval.
 - When the municipality receives approval and confirmation of completed building value from the building official, you will be invoiced for the costs. Permits will be issued when payment is received.

If you have any questions please call our office at (306) 469-2323 or email us at rm555@rmofbigriver.ca.

Section 7 (1) Uniform Building and Accessibility Standards Act(...the owner of each building in Saskatchewan shall ensure that the building is designed, constructed, erected, placed, altered, repaired, renovated, demolished, relocated, removed, used or occupied in accordance with the building standards."

If you have any questions related to building standards, please call BuildTECH Consulting at (306) 370-2824 or email to inspection@btinspections.ca.

NOTE: No accessory building (garage or shed, etc) may be built prior to the dwelling being built.



Instructions on completing Building & Development Application Package:

- Must be completed and submitted to the RM, along with a site plan and Development Permit Application Fee of \$50.00 for a permitted use or \$200.00 for a discretionary use.
- Section 5 of the Development Permit Application should be left blank and will be completed from maps at the RM office when the permit is submitted.
- Site plan must be completed with all set backs clearly marked from building to all 4 property lines, north direction, all accessory buildings and drainage direction.

Application for Building Permit

• Must be completed and submitted to the RM, along with all required drawings, information and forms included with the Permit Application Checklist from BuildTECH Consulting & Inspections Inc.

Permit Application Checklist – BuildTECH

- BuildTECH supplies these forms that must be completed before the permit will be approved. Once approved by BuildTECH the invoice will be emailed.
- To speed up the approval process ensure all forms are completed before returning.

Application for a Permit to Demolish or Move a Building

- Must be completed and submitted to the RM for any building to be moved into or out of the municipality. There is no charge for a moving permit. The RM must be informed when the moving of the building is complete.
- Must be completed and submitted to the RM for any building to be demolished within the
 municipality, along with the Demolition Permit Fee of \$50.00. The RM must be informed when the
 demolition is complete. RM will inform SAMA of the removal of building so they property can be re
 assessed.

Rural Plumbing/Sewage Disposal Permit Application - Submit to Regional Health Authority

- Must be completed and submitted to Regional Health Authority Health Inspection office to apply
 for a plumbing/sewage disposal permit. Please deposit a copy of your <u>Valid Sewage Disposal Permit</u>
 to the RM Office as soon as you receive it.
- The RM must have a copy prior to any permits being issued.

All documents must be submitted together and fully completed. If not the approval process will take much longer.

E-transfer: payments@rmofbigriver.ca Cheque, cash or debit.

Rural Municipality of Big River No. 555

DEVELOPMENT PERMIT APPLICATION

Applicants are encouraged to check the regulations in the RM of Big River No. 555 Zoning Bylaw, 23-01-02 that governs the type of development proposed prior to completing the application. Fill out only those sections of the application which are relevant to your proposal. Attach additional sheets if necessary.

Applicant Info	ormation	2	Registered O	wner Informatior	(if different from applicant)
Full Name _ Address _			Full Name Address		
Phone _ Email _			Phone Email		
Property Info	rmation (include any a	applicable)			
			Block	Plan No	
	Section			e	
e.g. NE 27-56-07					
Proposed Dev	elopment Information	1			
a) Existing use o	f land and/or buildings:				
				_ EXISTING SIZE	:
b) Proposed use	of land and/or buildings:				
				PROPOSED SIZ	E:
c) Proposed con	struction and alteration of	buildings:			
d) List any adjac	ent or nearby land uses: _				
e) Any additiona	al information which may b	e relevant:			
f) Proposed date	of start:	g) Pro	oposed date of c	ompletion:	

5 Potential Development Constraints

RM OFFICE USE ONLY

FOR RM USE ONLY: Consult the RM of Big River No. 555 Official Community Plan Bylaw, No. 1/16, Maps 1 through 5 and indicate with x whether the proposed development site is located within any of the following areas:

Map 1 – Preferred Transportation Corridors Preferred transportation corridor
Map 2 – Soil Capability for Agriculture
High capability (green)
Moderate capability (yellow)
Low capability (red)
Organic (brown)
Map 3 – Separation Distances Required by a Potential ILO (FOR ILO APPLICATIONS ONLY)
No ILOs Permitted
ILOs up to 499 Animal Units
ILOs up to 2,000 Animal Units
ILOs > 2,000 Animal Units

Map 4 – Development Constraints
Terrestrial wildlife habitat
Wetland
1 km rural-urban fringe
Future urban growth area
457 m lagoon setback
First Nations reserve
Provincial parks & recreation sites
Resort / country residential subdivision
Recreation development
Map 5 – Digital Elevation Model
Wiap 5 - Digital Lievation Wodel
Approx. elevation between 462—554 (blue—cyan)
Approx. elevation between 554—645 (yellow—red)

6 Site Plan / Vicinity Map

On the last page of this development permit application, show a Site Plan / Vicinity Map of the proposed development that shows:

- a) dimensions of the site
- b) location and size of all existing and proposed buildings and structures
- c) utility lines, easements, or topographic features
- d) proposed location of sewage system and water supply
- e) access points to provincial highway or municipal road
- f) <u>FOR ILOS ONLY:</u> the location, distance, and direction to neighbouring sites/dwellings

7 Application Fees

As per the RM of Big River Zoning Bylaw No. 1/19, the applicable fees for a development permit are as follows:

a) Development Permit: \$50.00

b) Building Permit BuildTECH: Determined by sq. ft./Inspection c) Building Permit RM Office: Determined by sq. ft./Office Fee

d) Discretionary Permit: \$200.00

These fees are in addition to any fees relating to a zoning amendment. Please contact the RM office for the amount to submit.

8 Declaration of Applicant

l,	of the					in the Province of									solemnly	
declare	that	the	above	statements	contained	within	this	application	are	true,	and	I m	ake	this	solemn	declaration
conscien	tious	ly bel	lieving i	t to be true, a	and knowing	g that it	is of t	the same for	ce an	d effe	t as if	fmac	le ur	nder d	oath, and	by virtue of
the Cana	ada Ev	/iden	ce Act.	I have no ol	ojection to	the entr	y upo	on the land d	lescri	bed he	erein	by th	ie pe	erson	(s) autho	rized by the
Rural Mu	unicip	ality	of Big R	iver No. 555 f	for the purp	ose of s	ite in	spections req	Juired	d for re	viewi	ng th	is ap	plica	tion.	


I understand the information provided in this application will be shared with Saskatchewan Assessment Management Agency (SAMA).

Signature of Applicant	Date

RURAL MUNICIPALITY of BIG RIVER No. 555

--- SASKATCHEWAN ----

SITE PLAN / VICINITY MAP

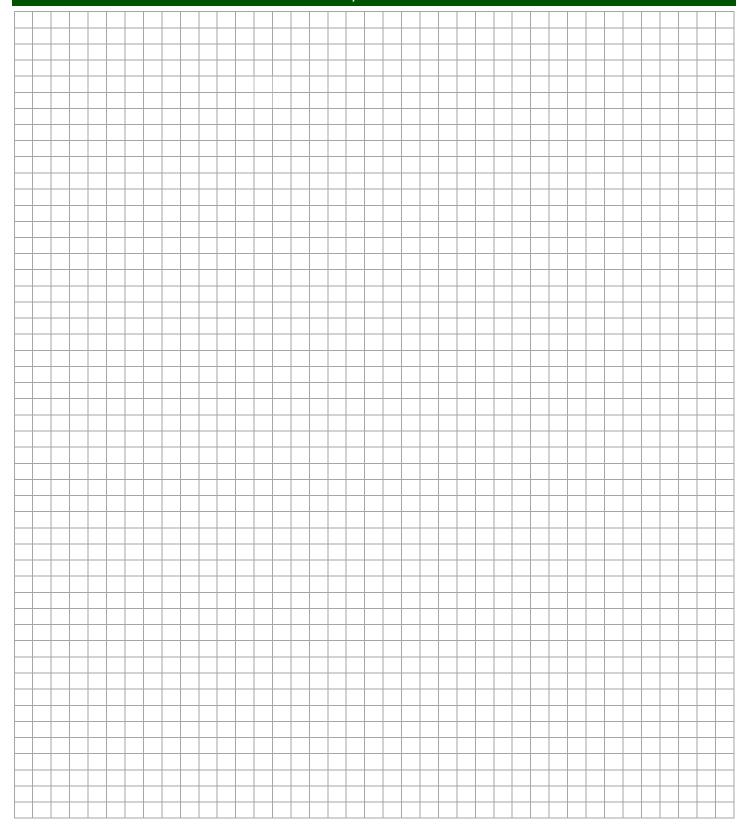

Additional Information Please reference which section the additional information is referring too.





I hereby make application for		ConstructAlterReconstruct					
A building according to the int	formation below and to the	plans and documents	attached to this application.				
Legal land description:							
Subdivision	Lot BI	ock Plan No	·				
Part Section e.g. NE 27-56-07	Township	Range	_ W3rd				
 Engineer	EmailEmail EmailEmail all not be constructed or plus completed and submitted ou will be invoiced for the base permits. It all understand that permits with 17/19), signed by the Building Bylamply with the Building Bylample compliance with the Building Bylample and regulations regardless I authority or its authorized	aced on any site prior of the RM, along with uilding permit once the dission to begin building ding Official or Adminity of the local author of any plan review or irepresentative.	Telephone Telephone Telephone Telephone Telephone Telephone Telep	oal on ing my ner be			

www.buildtechinspections.ca

p: 306.370.2824 f: 306.978.3014 e: info@btinspections.ca Box 1612 . Martensville, SK . SOK 2TO

Permit Application Checklist – DECK

Home Owner/Builders: The following information is required when submitting an application for a residential building permit and before a building permit is issued. The plan review will not begin until all required information is provided.

APPLYING FOR A BUILDING PERMIT DOES NOT EQUATE TO PERMISSION TO START CONSTRUCTION – BUILDING PERMITS WILL BE ISSUED BY THE MUNICIPALITY ONCE ALL ZONING AND BUILDING APPROVALS ARE COMPLETE.

Required Information:

A complete set of plans are required to be submitted and shall include the following:

- "Deck Checklist" properly filled out.
- **Site Plan** with the following information:
 - Show size and location of proposed house, size and location of existing buildings on property, lot dimensions and shape, distance between buildings and property lines, and include a North direction arrow.
- Floor Plans with the following information:
 - Show overall floor plan of deck including stair location and dimensions, and all railing locations
- Structural Drawings with the following information:
 - o Foundation, post, beam, and joist layout, sizes, locations, and spans.
 - o A completed "Deck Worksheet" form will provide most of the required structural information.
 - See also "BuildTECH Bulletin DECKS, FAQ".

When is an Engineer Required?

- Professionally designed sealed engineer drawings may be required for the following conditions:
 - The use of screw piles.
 - Concrete piles in certain situations, including if they support roof load.

Required On-Site Inspections: (inspection requirements may change depending on the project type and size)

- One inspection is required when the deck framing is complete, and it is ready for use including completion of all railings.
- If framing is to be covered with finishes, call for inspection prior to installation of any finishes.

Inspection Call-In Program:

- It is the owner's responsibility to contact BuildTECH to arrange for all mandatory inspections.
- Work shall not proceed to a point that would cover up any required inspection stages.
- Failure to notify BuildTECH with appropriate time frames could lead to measures to uncover work at the owner's expense.
- Contact BuildTECH at 306-370-2824 to arrange for inspections; please provide at minimum 72 hours' notice.

RESIDENTIAL DECK - PERMIT APPLICATION CHECKLIST

Applicant's Name:	Please fill in all requested information and checkboxes to ensure a proper building code assessment can be completed prior to					
Project Street Address:	ssuing a building permit.					
GUARDS: -SHALL NOT BE MADE 'CLIMBABLE' -MIN. HEIGHT "O": -MIN. HEIGHT "O": -MIN. HEIGHT "S 2" -MIN. HEIGHT "S" -MIN. HE						
	Prepared by BuildTECH Consulting & Inspections Inc.					
	www.buildtechinspections.ca					

DECK DEVELOPMENT CHECKLIST, PAGE 2 CODE ARTICLES

Article NBCC 2015	Description The following NBCC Article descriptions are summaries of the articles and sentences, not the actual NBCC 2010 code article.
9.3.2.9.	Structural wood framing members shall be pressure-treated to resist decay where the vertical clearance between the framing members and the ground is less than 150 mm (6").
9.8.7.1.	A handrail is required for exterior steps with more than 3 risers. The handrail height is to be between 865 mm (34") and 965 mm (38") high.
	Guard rails are required around decks & landings where the surface is more than 600 mm (24") higher than the adjacent ground. Guard rails are required to be minimum 900 mm high (36"), and 1070 mm (42") high where the surface is more than 1800 mm (72") above the adjacent ground.
	900 mm (36") high guard rails (measured vertically from a line drawn through the stair nosings) are required on flights of steps where the tread height is more than 600 mm (24") above the adjacent ground.
	Openings through any guard shall be of a size that will prevent the passage of a spherical object having a diameter of 100 mm (4").
9.8.8.	Where decks are more than 4.2 m (13'-9"), guards are to be constructed so that they will not facilitate climbing, where all elements protruding from the vertical and located within the area between 140 mm and 900 mm above the floor or walking surface protected by the <i>guard</i> conform to at least one of the following Clauses: a) they are located more than 450 mm horizontally and vertically from each other,
	b) they provide not more than 15 mm horizontal offset, c) they do not provide a toe-space more than 45 mm horizontally and 20 mm vertically, or d) they present more than a 2-in-1 slope on the offset.
9.17.2.2.	The wood posts are required to be laterally supported if the distance from finished ground to the underside of the joists is more than 600 mm (24"). Toenailing beams to posts is not considered adequate lateral support. Provide mechanical connections that will provide lateral support, or lateral bracing (i.e. knee bracing) connecting the posts to the deck frame.
0.47.2.2	Where the distance from grade to the underside of the deck joists is more than 2 m (6'), then posts supporting the deck beam shall be minimum 6x6, or 3-ply 2x6 built-up columns. 4x4 posts are not permitted.
9.17.2.2.	Decks where the distance from grade to the underside of the deck joists is more than 2 m (6') shall be supported on concrete piles, minimum 10" diameter x 10' deep c/w Sonotube and re-bar, and adequate means of securing the post to the piles.
9.23.1.1.	The maximum spacing for stair stringers is 30" o.c.
9.23.4.2.	The maximum span (distance between posts) for a 2 ply 2x10 beam is 9'-4". The maximum span (distance between posts) for a 2 ply 2x8 beam is 7'-8". Other beam spans are to be designed in accordance with Sentence 9.23.4.2. of the NBCC 2010, or the Canadian Wood Council's "Span Book".
9.23.9.4.	The joists are required to be blocked, strapped, or cross-bridged at mid-span.
9.23.9.9.	The maximum length of the joist cantilever past the beam is 600 mm (24") for 2x8 joists, and 750 mm (30") for 2x10 joists.



BuildTECH Bulletin DECKS – Frequently Asked Questions

This is not meant to be explicit "How To" construction advice. Providing building code enforcement services does not permit BuildTECH to 'design' projects for owners. If you require additional information, or you are unsure of or confused by the information provided, please consult with a qualified contractor for all details concerning construction of a deck. Material suppliers can also be good sources of information regarding construction of decks.

Q: Do I need to use piles or will surface deck blocks be adequate?

A: Deck foundations are not specifically prescribed in the building code. And although there could be noticeable deck movement from frost, typically, surface mounted deck foundation systems like "deck blocks" or concrete pads have been proven to function as adequate foundations for decks. However, as decks get higher off the ground or support additional loads from a roof, the movement can become more noticeable, and be more of a structural concern.

When the height measured from ground to the underside of the joists is more than 72" (1800mm) or a roof is being supported, concrete piles or screw piles are required, and posts shall be at least 6"x6" or 3-ply 2"x6" – no 4"x4" posts.

Lateral bracing is very important as well; lateral bracing could be met with proper knee bracing or an appropriate mechanical connection bracket. Toe-nailing is not adequate lateral support.

Q: How should my ledger be attached to the house rim joist?

A: Generally speaking, 3 x 3-1/2" nails installed every joist space will support the ledger board, or ½" lag or through bolts installed @16" o.c. alternating stagger at 2" from top and 2" from bottom. If you have an Emercore rim joist you will need to reference the manufacturer's literature on how to properly attach a deck.

Q: How big does my beam need to be? How many posts do I need? What size joists do I need?

A: There are many variables that determine the size and spacing of deck frame components. Attached are tables showing the distance a beam or joist can span between supports. Please refer to these when designing your deck.

Q: Can I use screws to mount my joist hangers and deck brackets?

A: No. Screws do not provide enough shear strength to properly support joist hangers or other brackets with shear forces on them. Hangers are designed to be secured with high-shear hanger nails – hot dipped galvanized should work best with galvanized metal hangers and brackets.

Q: How high does my guard rail need to be on my deck?

A: The height of guardrails is dependent on the height of the deck, measured between the deck surface and the adjacent ground level. If the distance is between $\geq 24''(600\text{mm})$ and $\leq 72''(1800\text{mm})$ the height of the guardrail is required to be at least 36''(900mm) high, and if it is $\geq 72''(1800\text{mm})$ the guardrail is required to be 42''(1060mm) high. Also, it must be constructed so no part can facilitate climbing and the maximum distance between the vertical rails is 4''(100mm).

Q: When do I need a handrail on my steps? When do I need a guardrail on my steps?

A: A handrail is required when there are **more than** 3 risers, and a guardrail is required when the tread height is more than 24" (600mm) above the adjacent ground.

Q: What dimensions do I need for my steps?

A: The dimension of the riser must be between 5" and 8", while the dimension of the tread must be between 9.25" and 14". All steps must have uniform rise and uniform run. This means that in a flight of stairs, every riser must be the same height, and every tread must have the same depth. For this reason pre-fabricated metal stringers may not always fit properly at the top and/or bottom of the steps.

Joist Sizing Table

Joist	2x6			2x8				2x10		2x12			
Sizes													
Spacing	12"o.c.	16"o.c.	24"o.c.	12"o.c	16"o.c.	24"o.c.	12"o.c	16"o.c.	24"o.c.	12"o.c	16"o.c.	24"o.c.	
Joist	10'-4"	9'-4"	8'-2"	13'-6"	12'-4"	10'-9"	17'-3"	15'-8"	13'-9"	20'-4"	18'-9"	16'-8"	
Span													

^{*}Joist span – distance between supports

2-Ply Beam Sizing Table

Supported Joist Length	2 ply 2"x6"	2 ply 2"x8"	2ply 2"x10"	2 ply 2"x12"
8'-0"	6'-1"	7'-8"	9'-4"	10'-10"
10'-0"	5′-7″	6'-10"	8'-4"	9'-8"
12'-0"	5'-1"	6'-3"	7'-7"	8'-10"
14'-0"	4'-9"	5'-9"	7'-1"	8'-2"
16'-0"	4'-5"	5'-5"	6'-7"	7'-8"
18'-0"	4'-2"	5'-1"	6'-3"	7'-1"
20'-0"	4'-0"	4'-10"	5'-9"	6′-7″

^{*}Supported Joist Length $-\frac{1}{2}$ joist span measured between supports.

Large Beam Sizing Table

		2"x8"			2"x10"		2"x12"			
Supported Joist Length	3 ply	4 ply	5 ply	3 ply	4 ply	5 ply	3 ply	4 ply	5 ply	
8'-0"	10'-7"	12'-2"	13'-8"	12'-11"	14'-11"	16'-8"	15'-0"	17'-4"	19'-4"	
10'-0"	9'-5"	10'-11"	12'-2"	11'-7"	13'-4"	14'-11"	13'-5"	15'-6"	17'-4"	
12'-0"	8'-8"	10'-0"	11'-2"	10'-7"	12'-2"	13'-7"	12'-3"	14'-2"	15'-10"	
14'-0"	8'-0"	9'-3"	10'-4"	9'-9"	11'-3"	12'-7"	11'-4"	13'1"	14'-8"	
16'-0"	7′-6″	8'-8"	9'-8"	9'-2"	10'-7"	11'-`10"	10'-7"	12'-3"	13'-8"	
18'-0"	7'-1"	8'-2"	9'-1"	8'-7"	9'-11"	11'-1"	10'-0"	11'-7"	12'-11"	
20'-0"	6'-8"	7'-9"	8'-8"	8'-2"	9'-5"	10'-8"	9'-6"	10'-11"	12'-3"	

^{*}Supported Joist Length $-\frac{1}{2}$ joist span measured between supports.




CONSTRUCTION CODE AUTHORITY


Of Saskatchewan

Building Standards Bulletin

21-BCB-009 January 2021

Built-up Wood Beams

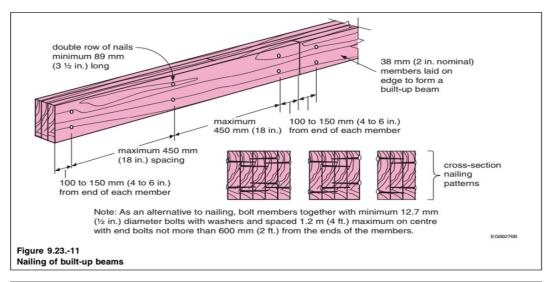

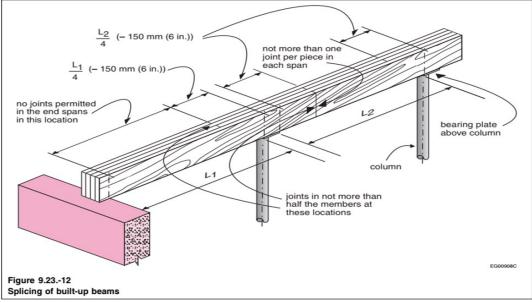



"Making buildings a safer place to live, work and play"




al.	1

CCA-SK

Permit Application Worksheet

Covered Deck Roof

21-WS-009

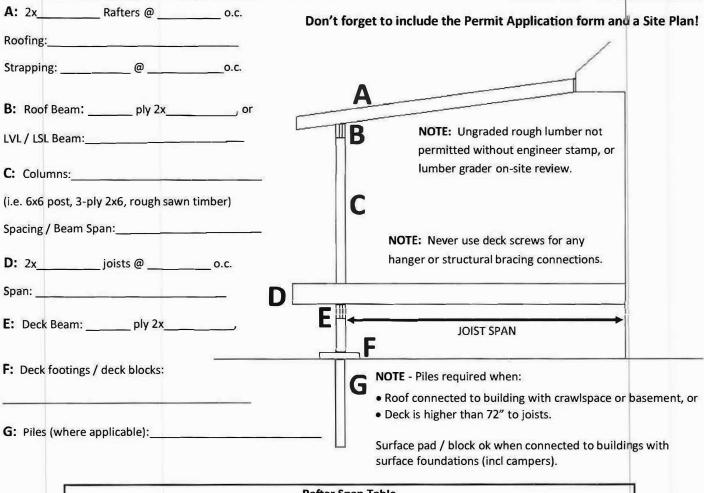

			Rat	fter Span Ta	ble			
Rafter Size: Spacing:	2x4		2x6		2x8		2x10	
	16"	24"	16"	24"	16"	24"	16"	24"
Allowable Span	7-4	6-5	11-7	10-1	15-3	12-9	19-1	15-7

